


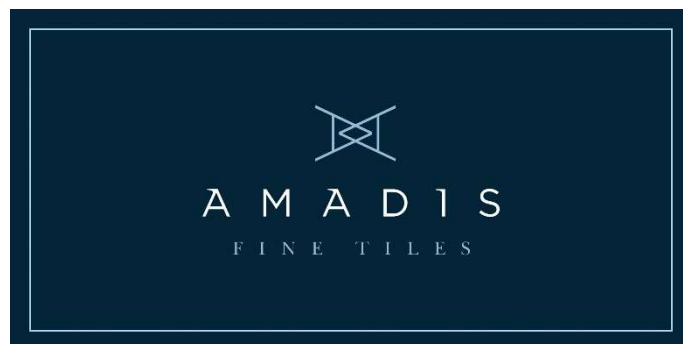

TECHNICAL DATA SHEET

SHORT STICK CRACKLE 2X15 CMS

- Dimensions


Characteristic	Norm	Average value depending on nominal dimension N	
		$7\text{cm} \leq N < 15\text{cm}$	$N \geq 15$
Lenght and width	EN ISO 10545-2	$\pm 0,9\text{mm}$	$\pm 0,6\% / \pm 2,00\text{mm}$
Thickness	EN ISO 10545-2	$\pm 0,5\text{mm}$	$\pm 10\% / \pm 0,5 \text{ mm}$

- Phisical properties

Characteristic	Norm	Average Value
Water absorption	EN ISO 10545-3	$> 10\%$ (BIII)
Breaking of rupture	EN ISO 10545-4	$> 600 \text{ N}$
Modulus of rupture	EN ISO 10545-4	$> 12 \text{ N/mm}^2$
Resistance to termal shock	EN ISO 10545-9	Not applicable
Crazing resistance	EN ISO 10545-11	Not applicable

- Chemical properties

Characteristic	Norm	Average Value
Household chemicals	EN ISO 10545-13	Not applicable
Low concentration of acids and alkalis	EN ISO 10545-13	Not applicable
Stain resistance	EN ISO 10545-14	Not applicable

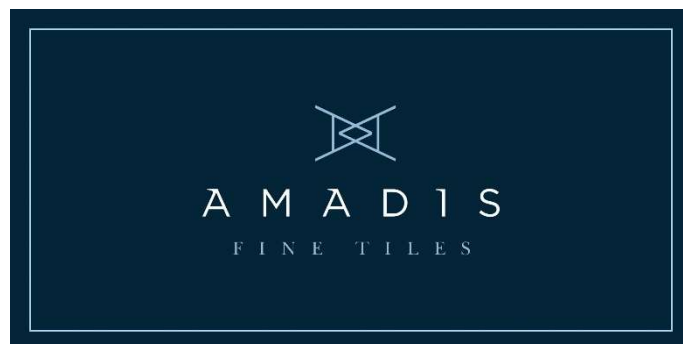

TECHNICAL DATA SHEET

SHORT STICK GLOSSY 2X45 CMS

Dimensions

Characteristic	Norm	Average value depending on nominal dimension N	
		$7\text{cm} \leq N < 15\text{cm}$	$N \geq 15$
Lenght and width	EN ISO 10545-2	$\pm 0,9\text{mm}$	$\pm 0,6\% / \pm 2,00\text{mm}$
Thickness	EN ISO 10545-2	$\pm 0,5\text{mm}$	$\pm 10\% / \pm 0,5\text{ mm}$

- Physical properties

Characteristic	Norm	Average Value
Water absorption	EN ISO 10545-3	$> 10\%$ (BIII)
Breaking of rupture	EN ISO 10545-4	$> 600\text{ N}$
Modulus of rupture	EN ISO 10545-4	$> 12\text{ N/mm}^2$
Resistance to termal shock	EN ISO 10545-9	Resistant
Crazing resistance	EN ISO 10545-11	Resistant

- Chemical properties

Characteristic	Norm	Average Value
Household chemicals	EN ISO 10545-13	A
Low concentration of acids and alkalis	EN ISO 10545-13	LA
Stain resistance	EN ISO 10545-14	5